



CORRUGATED EXTRUDED MULTIWALL POLYCARBONATE UV PROTECTED MODULAR SYSTEM FOR TRANSLUCENT FLAT SKYLIGHT AND ROOFING IN APPLICATION WITH CORRUGATED COMPOSITE PANELS

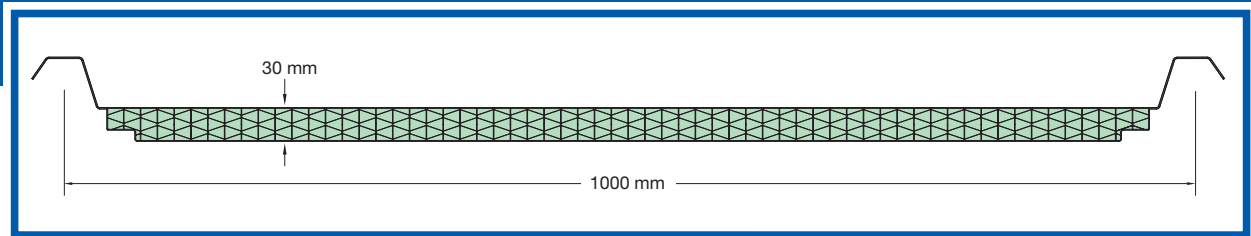

GP30

Gp 30 FLAT APPLICATION ON MORE SUPPORTS

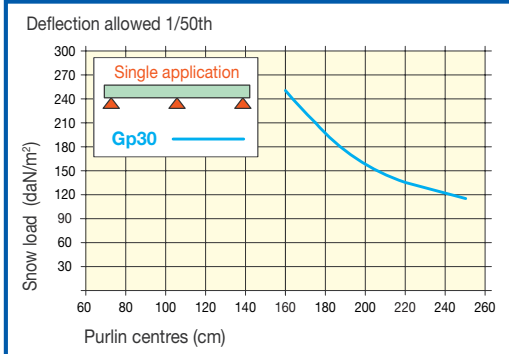

FEATURES GP 30

PRODUCTION FEATURES	Thickness	30 mm
	Structure	6-wall
	End	taped
	Sheet width	1000 ± 5
	Sheet length	upon request (max. length recommended is 7mtr)
PHYSICAL-THERMAL FEATURES	Thermal insulation	U = 1,32
	Temperature working range	- 40°C + 130° C
	Linear thermal expansion	6.7 x 10 ⁻⁵ mm./mm.°C*
LIGHT TRANSMISSION FEATURES	Satinized clear colour	59% ± 2
	Opal colour	30% ± 2

*GENERAL DATA TAKEN FROM LITERATURE

SINGLE SHEET APPLICATION

